

MAVERICK



 **DrillKing**
INTERNATIONAL

- **Advanced Technology, Simple Design**
- **25% Fewer Parts**
- **Increased Drilling Speeds**
- **Maximum Performance With Minimal Problems**
- **Unsurpassed Footage Consistency In Deep Applications**
- **A Quality Hammer For All Applications**
- **IR340A Shank**

To learn more how you can “**Hammer the Competition**” contact:


DRILL KING INTERNATIONAL

1106 N. Commercial Blvd, Arlington, TX 76001, USA

Phone: (817) 676-9800 * Toll Free: (866) 900-2487 * Fax: (817) 468-9030

rbroseh@drillking.net * www.drillking.net

DOWN HOLE HAMMER MV40

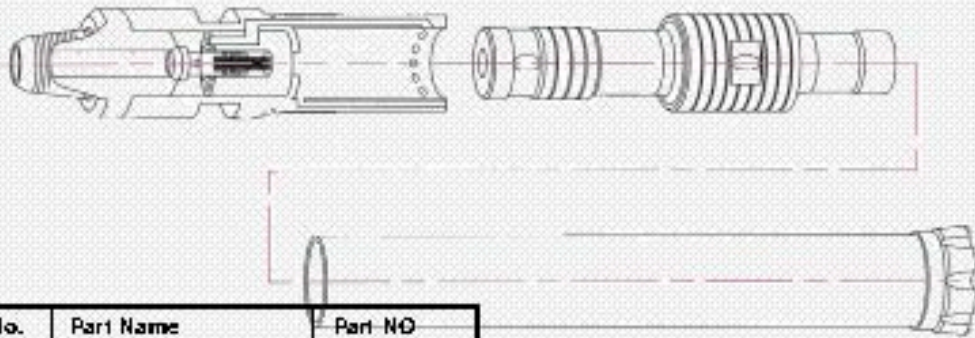


No.	Part Name	Part NO
1	WEAR RESISTANT	HPMV04001
2	TOP SUB	HPMV04002
3	O-RING	HPMV04003
4	CHECK VALVE	HPMV04004
5	PLUG	HPMV04005
6	COIL SPRING	HPMV04006
7	BACK HEAD	HPMV04007
9a	O-RING	HPMV04009
9b	O-RING	HPMV04009
10	PISTON	HPMV04010
11	STOP RING	HPMV04011
12	BEARING	HPMV04012
15	BIT RETAINER RING	HPMV04015
16	O RING, BIT RET	HPMV04014
17	CHUCK	HPMV04017

SPECIFICATIONS

Outside Diameter	Tool Length (Without Bit)	Weight (Less Bit)
3.86"	37"	77 lbs
Piston Weight	Standard Shank	Standard Top Sub
19.9 lbs	IR340A	AP12-3/8" PIN

AIR CONSUMPTION

160 PSI	260 PSI	360 PSI
290 CFM	990 CFM	780 CFM

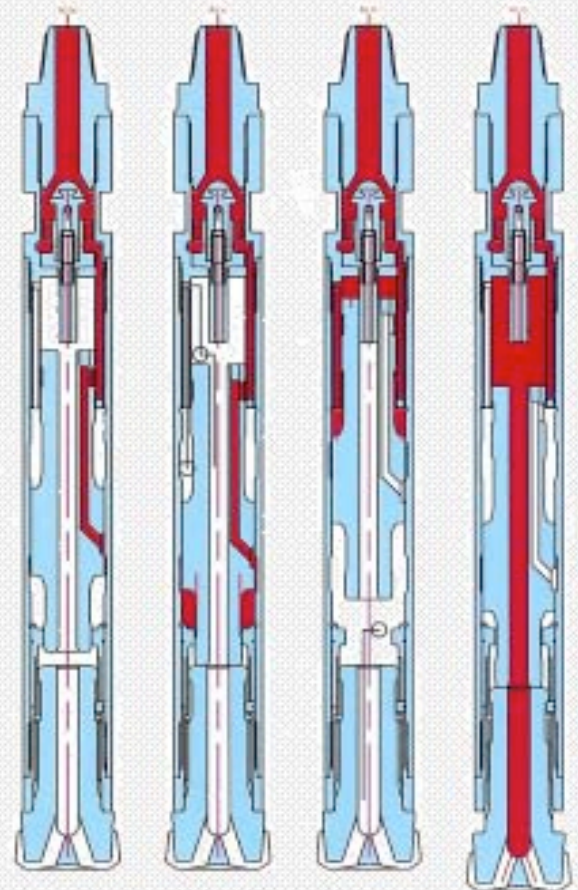

THE MAVERICK'S PATENT PENDING AIR FLOW DESIGN REQUIRES LESS PARTS AND DELIVERS MORE POWER.

CREATING AN UN-SURPASSED DRILLING CONSISTANCY IN DEEP APPLICATIONS

To learn more how you can "Hammer the Competition" contact:

DRILL KING INTERNATIONAL

1106 N. Commercial Blvd, Arlington, TX 76001, USA

Phone: (817) 676-9800 * Toll Free: (866) 900-2487 * Fax: (817) 468-9030

rbroseh@drillking.net * www.drillking.net